




NOCO BOOST PLUS™ JUMP STARTER

GB40 12V 1000A

Lithium

6.0L Gas 3.0L Diesel

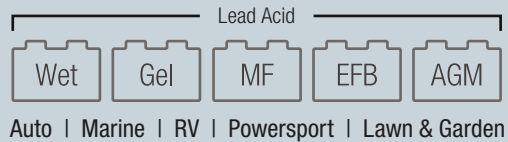

USB 2.1A

What's In The Box

- GB40 Lithium Jump Starter
- Heavy-Duty Battery Clamps
- 12V Car Charger
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

Technical Specifications


Internal Battery:	24 Watt-Hour Lithium Ion	Housing Protection:	IP65 (w/ Ports closed)
Peak Current Rating:	1000A	Cooling:	Natural Convection
Operating Temperature:	-4°F to +122°F (-20°C to +50°C)	Dimensions (LxWxH):	7.7 x 3.2 x 1.7 in
Charging Temperature:	32°F to +104°F (0°C to +40°C)	Unit Weight:	1.65 lbs
Storage Temperature:	-4°F to +122°F (-20°C to +50°C)	Unit Weight w/Clamps & Accessories:	2.4 lbs
Micro USB (Input):	5V, 2.1A	LED Flashlight Brightness:	100 Lumens
USB (Output):	5V, 2.1A		

NOCO BOOST HD™ JUMP STARTER

GB70 12V 2000A

Lithium

8.0L Gas 6.0L Diesel

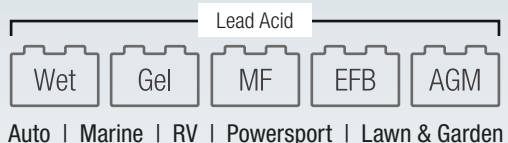

USB 2.1A

What's In The Box

- GB70 Lithium Jump Starter
- XGC 12V Male Adapter
- XGC 12V Female Adapter
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

Technical Specifications

Internal Battery:	56 Watt-Hour Lithium Ion	Micro USB (Input) & USB (Output):	5V, 2.1A
Peak Current Rating:	2000A	Housing Protection:	IP65 (w/ Ports closed)
Operating Temperature:	-4°F to +122°F (-20°C to +50°C)	Cooling:	Natural Convection
Charging Temperature:	32°F to +104°F (0°C to +40°C)	Dimensions (LxWxH):	8.8 x 6.0 x 2.8 in
Storage Temperature:	-4°F to +122°F (-20°C to +50°C)	Unit Weight:	4 lbs
12V (Input):	12V (3A)	Unit Weight & Accessories:	5 lbs
12V (Output):	12V (15A)	LED Flashlight Brightness:	400 Lumens


Boosters



NOCO BOOST PRO™ JUMP STARTER



GB150 12V **4000A** | **10.0L+**
 Lithium | Gas + Diesel

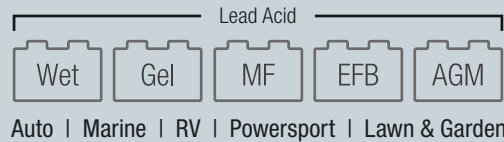

What's In The Box


- GB150 Lithium Jump Starter
- XGC 12V Male Adapter
- XGC 12V Female Adapter
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

Technical Specifications

Internal Battery:	89 Watt-Hour Lithium Ion	Micro USB (Input) & USB (Output):	5V, 2.1A
Peak Current Rating:	4000A	Housing Protection:	IP65 (w/ Ports closed)
Operating Temperature:	-4°F to +122°F (-20°C to +50°C)	Cooling:	Natural Convection
Charging Temperature:	32°F to +104°F (0°C to +40°C)	Dimensions (LxWxH):	12.4 x 7.3 x 2.7 in
Storage Temperature:	-4°F to +122°F (-20°C to +50°C)	Unit Weight:	6 lbs
12V (Input):	12V (5A)	Unit Weight & Accessories:	7.5 lbs
12V (Output):	12V (15A)	LED Flashlight Brightness:	500 Lumens

Genius BOOST MAX Jump Starter™

NOCO GB500 Lithium 12V/24V | Class **8+**
 Class **CE**
 Gas & Diesel

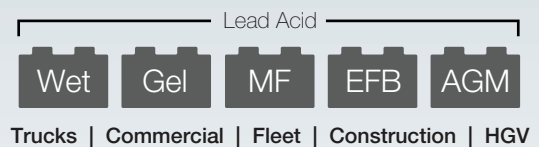

Voltmeter

What's In The Box

12V Portable Power



- GB500 Lithium Jump Starter
- Boost MAX POS/ NEG Connectors (24in)
- 56W XGC Power Adapter
- 12V Female Plug (OUT)
- 12V Male Plug (IN)
- 12V 2' XGC Cable
- Protective Carrying Case
- User Guide

Technical Specifications

Internal Battery:	Lithium-Ion	12V (Input/Output):	12V, 5A IN / 12V, 15A OUT
Peak Current Rating:	20,000A	USB (Output):	Dual 5V, 2.1A
Joules^{8S}:	80,000+	Housing Protection:	IP65 (w/ Ports closed)
Voltage:	12V & 24V Batteries	Cooling:	Natural Convection
Operating Temperature:	-30°C to +50°C	Dimensions (LxWxH):	12.3 x 8.2 x 6.3 in
Charging Temperature:	0°C to +40°C	Weight:	19.25 lbs
Storage Temperature:	-20°C to +50°C	LED Brightness:	2200 lumens

Boosters



BOOSTERS CAR + TRUCK

50 Ah + 50 Ah INSIDE

12/24V

1 REGULATED
100V
FAST CHARGE


HIGH QUALITY BATTERIES

PROFESSIONAL+++

 OCCASIONAL INTENSIVE



SMART STARTER MANAGEMENT SYSTEM



STARTPACK PRO 12.24 XL

8 500 A	12V	1V DC 1600 A
4 250 A	24V	1V DC 1400 A

28 Ah



SPIRAL TECHNOLOGY

28 Ah

026711



 1 000 A
 2 m ø 70 mm²
 INCLUDED

INCLUDED GYSFLASH XL 6.12



8 step smart charge
Advanced technology

6 A



STANDARD CABLES

1000 A - 70 mm² - 2 m 026797 (INCLUDED)

1000 A - 70 mm² - 4 m 026827

NATO CABLES

2 m - 50 mm² 026803

NATO CONNECTOR 026780


 NATO ID / NCAGE:
 F8154 CG730


 Après chaque utilisation
 After each use
 Nach jeder Anwendung

	12V	START			TEST	CHARGER INSIDE	Protection		Power out		Fuse	Fuse	Dimensions	Weight	
		Inside	1V/C	Cranking CC			Peak Battery	ON/OFF	3G	Memory					300 A
STARTPACK 12.24 XL PRO	2x 50 Ah	12V 24V	1 600 A 1 400 A	3 000 A 2 600 A	8 500 A 4 250 A	6 A outside	automatic	•	—	300 A	2 m ø 70 mm ²	—	106 × 32 × 35 cm	112 × 35 × 43 cm	68 kg
ENERGY STATION	—	selon batteries/according to battery /je nach Batterie			CHARGE		Moyen / Average (EN 60335)		Efficace / RMS	2,5 m ø 50 mm ²	2 × 30 A	70 × 62 × 92 cm	80 × 53 × 28 cm	37 kg + batteries	
	•	12V	24V	min > max	35 × 225 Ah	2 × 15 A	2 × 22 A								

Boosters


BOOSTERS TRUCK




+ CHARGER AUTOMATIC x2

12/24V


ENERGY STATION

12/24V

026148

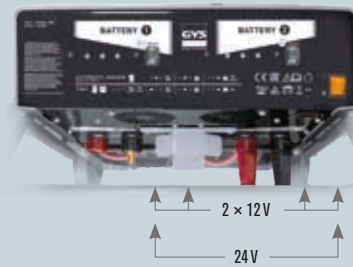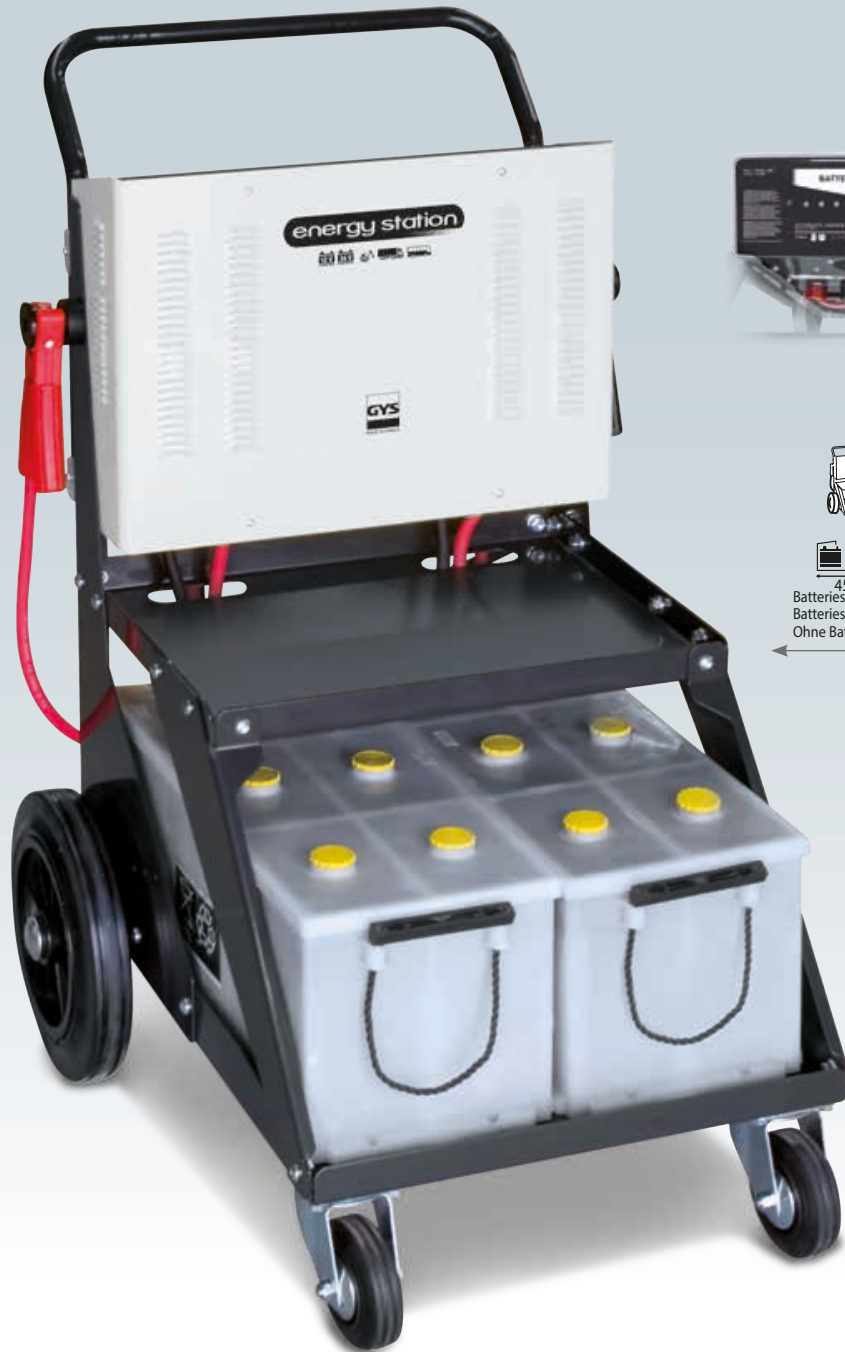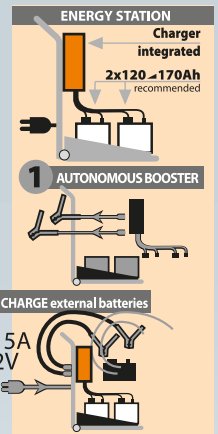
 45 53
 Batteries non fournies
 Batteries not provided
 Ohne Batterie geliefert


RECOMMENDATION	5 Ah			10 Ah			15 Ah			20 Ah			40 Ah			80 Ah			90 Ah			110 Ah			120 Ah			180 Ah			240 Ah			300 Ah			+ Ah		
	6V	12V	24V	6V			6V			6V			6V			6V			6V			6V			6V			6V			6V			6V			6V		
STARTPACK PRO 12.24 XL		•	•																																				
ENERGY STATION	-	-	-																																				